


Vigor 2910 PPTP 設定

[步驟 1] 進入 Vigor 2910 管理畫面，點選 [VPN and Remote Access] -> [Remote Dial-in User]

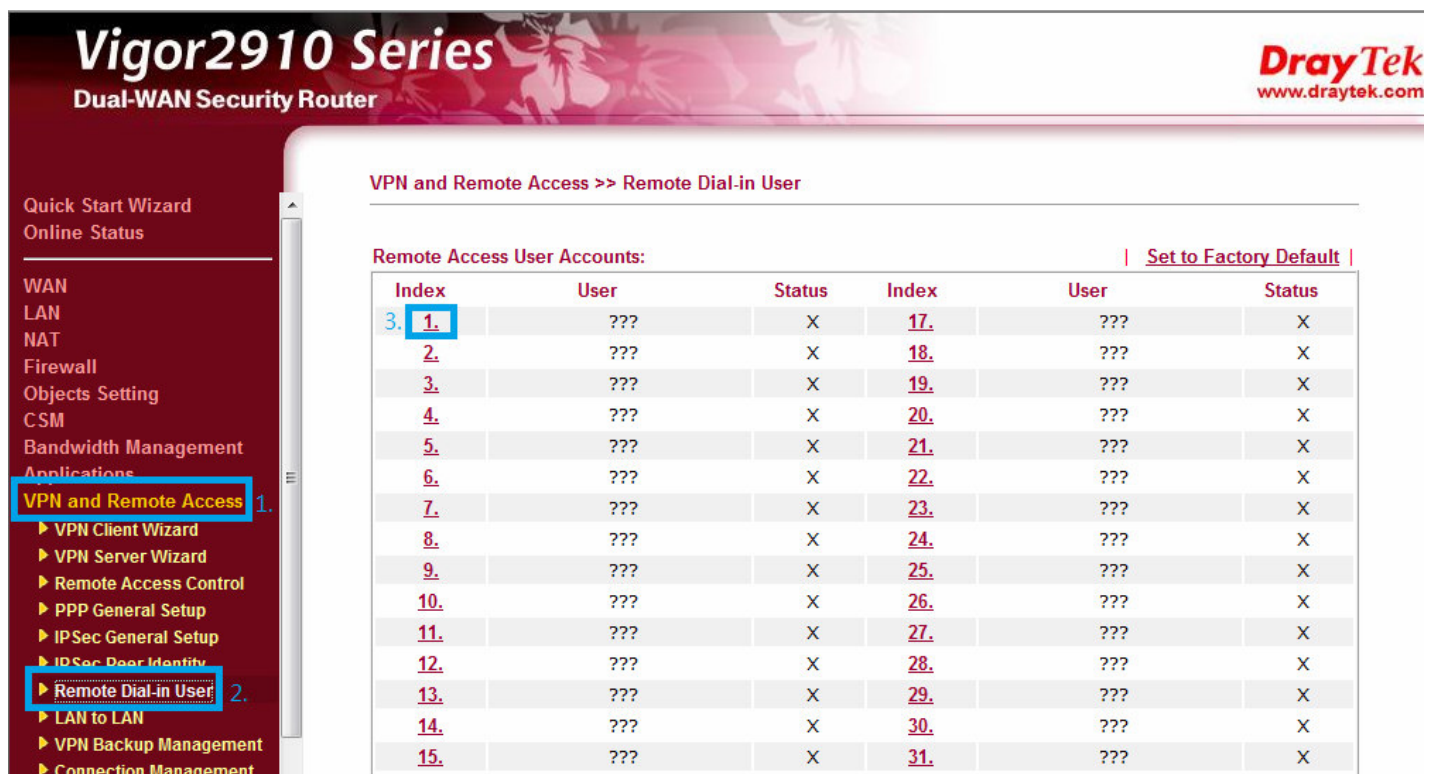

Vigor2910 Series
Dual-WAN Security Router

DrayTek
www.draytek.com

Quick Start Wizard
Online Status

WAN
LAN
NAT
Firewall
Objects Setting
CSM
Bandwidth Management
Applications
VPN and Remote Access
 ▶ VPN Client Wizard
 ▶ VPN Server Wizard
 ▶ Remote Access Control
 ▶ PPP General Setup
 ▶ IPsec General Setup
 ▶ IPsec Peer Identity
 ▶ **Remote Dial-in User**
 ▶ LAN to LAN
 ▶ VPN Backup Management
 ▶ Connection Management

VPN and Remote Access >> Remote Dial-in User

Remote Access User Accounts: | [Set to Factory Default](#) |

Index	User	Status	Index	User	Status
3. 1.	???	X	17.	???	X
2.	???	X	18.	???	X
3.	???	X	19.	???	X
4.	???	X	20.	???	X
5.	???	X	21.	???	X
6.	???	X	22.	???	X
7.	???	X	23.	???	X
8.	???	X	24.	???	X
9.	???	X	25.	???	X
10.	???	X	26.	???	X
11.	???	X	27.	???	X
12.	???	X	28.	???	X
13.	???	X	29.	???	X
14.	???	X	30.	???	X
15.	???	X	31.	???	X

[步驟 2] 請依照下面紅色框框的部分設定資料即完成 Vigor 2910 PPTP 設定。



Vigor2910 Series
Dual-WAN Security Router

DrayTek
www.draytek.com

Quick Start Wizard
Online Status

WAN
LAN
NAT
Firewall
Objects Setting
CSM
Bandwidth Management
Applications
VPN and Remote Access
 ▶ VPN Client Wizard
 ▶ VPN Server Wizard
 ▶ Remote Access Control
 ▶ PPP General Setup
 ▶ IPsec General Setup
 ▶ IPsec Peer Identity
 ▶ Remote Dial-in User
 ▶ LAN to LAN
 ▶ VPN Backup Management
 ▶ Connection Management

VPN and Remote Access >> Remote Dial-in User

Index No. 1 <- 項次1的設定內容如下

下面框選的資料都設定完畢後，請移到頁面最下方按下[OK]就設定完成了。

User account and Authentication

1. ☒ Enable this account 請打勾這個選項

Idle Timeout 2. 0 second(s) 設定0秒代表由PPTP撥入的使用者手動斷掉連線

Allowed Dial-In Type

4. ☒ PPTP 允許的撥入方式(使用PPTP連線)

☐ ISDN

☐ IPsec Tunnel

☐ L2TP with IPsec Policy None

☐ Specify Remote Node

Remote Client IP or Peer ISDN Number

or Peer ID

Netbios Naming Packet ☒ Pass ☐ Block

Multicast via VPN ☐ Pass ☒ Block

3. Username 設定撥入的PPTP ublink

Password 使用者帳號密碼

☐ Enable Mobile OTP

PIN Code

Secret

IKE Authentication Method

☒ Pre-Shared Key

IKE Pre-Shared Key

☐ Digital Signature (X.509)

None

IPsec Security Method

☒ Medium (AH)