


Vigor 以 SIP SERVER 建立 VOIP

Vigor 以 sip server 建立 voip 通聯將分成台北撥高雄與高雄撥

台北二步驟設定。

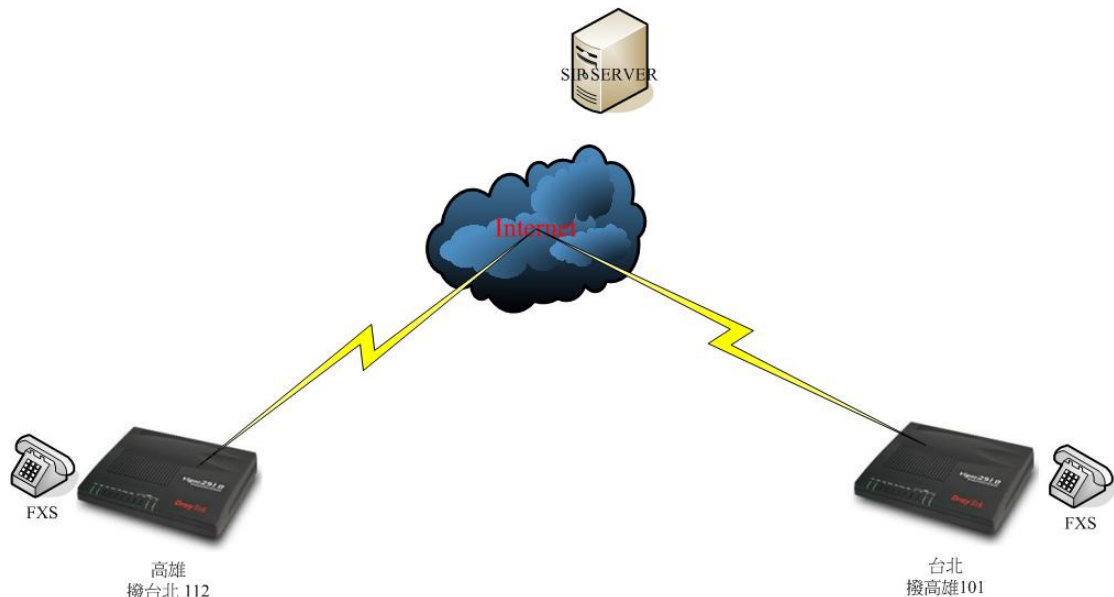

一、 台北撥高雄：撥號 101

- 1、 請先至 www.draytel.org 註冊 為高雄端申請一個 SIP 帳號，請點選 sign up



- 2、 請填入必填欄位與 mail address 並點選送出



Open a New Account

Company Name:	<input type="text"/>
First Name:	<input type="text"/> *
Last Name:	<input type="text"/> *
Email Address:	<input type="text"/> * (Please enter carefully)
City:	<input type="text"/>
County/Province:	<input type="text"/> * (e.g. Hertfordshire)
Post Code:	<input type="text"/>
Country:	<input type="text" value="Please Select"/> *
Telephone Number:	<input type="text"/>
Which SIP Product do you use?	<input type="text"/> (e.g. Vigor2600V, VigorTalk etc.)
How did you hear of DrayTEL ?	<input type="text" value="-- Please Select --"/>
Refer-a-Friend Scheme	<input type="text"/> (Enter your friend's DrayTEL A/C number) More Info

Vigor Voucher Redemption

3、接收 mail 並點選確認連結取得帳號與密碼

寄件者: DrayTEL 收件者: kao kao
主旨: Welcome to DrayTEL

With your new account you will be able to make calls to other DrayTEL subscribers for free as well as making calls to reg phone users at DrayTEL rates. Please visit the DrayTEL User Guide at www.draytel.org for instructions on configuring your device for DrayTEL. For additional help, please email info@draytel.org.

We have reserved the following DrayTEL ID for you: sip:868040@draytel.org

To finalize your registration please check the following link:

<https://admin.draytel.org/confirmation.php?nr=859992f1a5ca37c43e04cd1f44f675ab>

4、將所取得的帳號與密碼填入高雄端的 voip 的 sip account

上，domain /Realm 請填入 draytel.org，account name 請填入申請之帳號、password 請填入申請之密碼。若 voip 有跟 SIP 連線認證 STATE 欄位會出現 R

Quick Start Wizard

Online Status

WAN

LAN

NAT

Firewall

Objects and Groups

Bandwidth Management

Applications

VPN and Remote Access

Certificate Management

VoIP

▶ DialPlan

▶ SIP Accounts

▶ Phone Settings

▶ Status

Wireless LAN

VLAN

System Maintenance

VoIP >> SIP Accounts

SIP Accounts List

Refresh

Index	Profile	Domain/Realm	Proxy	Account Name	Ring Port	Status
1	Kaohsiung-1			Kaohsiung-1	<input checked="" type="checkbox"/> VoIP1 <input type="checkbox"/> VoIP2	-
2	Kaohsiung-2			Kaohsiung-2	<input type="checkbox"/> VoIP1 <input checked="" type="checkbox"/> VoIP2	-
3	Kaohsiung11	draytel.org	draytel.org	867722	<input checked="" type="checkbox"/> VoIP1 <input type="checkbox"/> VoIP2	R
4	Kaohsiung12	draytel.org	draytel.org	867726	<input checked="" type="checkbox"/> VoIP1 <input type="checkbox"/> VoIP2	R
5				change_me	<input type="checkbox"/> VoIP1 <input type="checkbox"/> VoIP2	-
6				change_me	<input type="checkbox"/> VoIP1 <input type="checkbox"/> VoIP2	-

R: success registered on SIP server
-: fail to register on SIP server

NAT Traversal Setting

STUN server:

External IP:

SIP PING interval: sec

Dual-WAN Security Router

Quick Start Wizard
Online Status

WAN
LAN
NAT
Firewall
Objects and Groups
Bandwidth Management
Applications
VPN and Remote Access
Certificate Management
VoIP
 ▶ DialPlan
 ▶ SIP Accounts
 ▶ Phone Settings
Wireless LAN
VLAN
System Maintenance
Diagnostics

All Rights Reserved.

Status: Settings Saved

VoIP >> SIP Accounts

SIP Account Index No. 3

ITSP: self-define

Profile Name: Kaohsiung11 (11 char max.)

Register via: Auto ☐ Call without Registration

SIP Port: 5060

Domain/Realm: draytel.org (63 char max.)

Proxy: draytel.org (63 char max.)

☐ Act as outbound proxy

Display Name: (23 char max.)

Account Number/Name: 867722 (63 char max.)

☐ Authentication ID: 867722 (63 char max.)

Password: (63 char max.)

Expiry Time: 1 hour 3600 sec

NAT Traversal Support: None

Ring Port: ☒ VoIP1 ☐ VoIP2

Ring Pattern: 1

OK Cancel

- 5、請在**台北端**訂定 dialplan，phone number 請填入 101，SIP URL 請填入高雄端所申請的帳號，@後填入 draytel.org。

Dual-WAN Security Router

Quick Start Wizard
Online Status

WAN
LAN
NAT
Firewall
Objects and Groups
Bandwidth Management
Applications
VPN and Remote Access
Certificate Management
VoIP
 ▶ DialPlan
 ▶ SIP Accounts

VoIP >> DialPlan Setup

DialPlan Configuration

[Phone Book](#)
[Digit Map](#)

Dual-WAN Security Router www.draytel.com

Quick Start Wizard
Online Status

WAN
LAN
NAT
Firewall
Objects and Groups
Bandwidth Management
Applications
VPN and Remote Access
Certificate Management
VoIP
 ▶ DialPlan
 ▶ SIP Accounts
 ▶ Phone Settings

VoIP >> DialPlan Setup

Phone Book

Index	Phone number	Display Name	SIP URL	Status
1.				x
2.				x
3.	101	toks-1	867722@draytel.org	v
4.	102	toks-2	867726@draytel.org	v
5.				x
6.				x
7.				x
8.				x
9.				x
10.				x

6、完成設定台北即可撥高雄號碼為 101。

二、高雄撥台北：撥號 112 與台北撥高雄是相反的步驟

1、請先為台北端申至 www.draytel.org 申請 SIP 帳號。

2、在台北端的 VOIP 上 SIP Account 填入所申請帳號密碼。

3、在高雄端訂定 dialplan

Dual-WAN Security Router

Quick Start Wizard
Online Status

WAN
LAN
NAT
Firewall
Objects and Groups
Bandwidth Management
Applications
VPN and Remote Access
Certificate Management
VoIP
 ▶ DialPlan

VoIP >> DialPlan Setup

Phone Book Index No. 4

☒ Enable

Phone Number	<input type="text" value="112"/>
Display Name	<input type="text" value="totp-2"/>
SIP URL	<input type="text" value="867732"/> @ <input type="text" value="draytel.org"/>

OK Clear Cancel

4、完成設定高雄即可撥台北號碼為 112。